

Solar Based Micro Hybridized Auto-Rickshaw & its Feasibility Analysis for Bangladesh

Avijit Mallik¹, Md. Arman Arefin² and Sujon Kumar Pal³

¹Dept. of Mechanical Engineering, RUET, Rajshahi-6204, Bangladesh

²Dept. of Mechanical Engineering, RUET, Rajshahi-6204, Bangladesh

³Dept. of Applied Mathematics, University of Rajshahi, Rajshahi-6204, Bangladesh

Email: avijitme13@gmail.com , dipto70@yahoo.com , sujonpal35@yahoo.com

***Abstract**-Automobile rickshaws are small, three-wheeled vehicles which are being used thoroughly in many Asian countries (i. e. Bangladesh, India, Pakistan etc.) for the sake of transportation of public and goods. The vehicles are small and narrow allowing for easy transportability in busy Asian metropolises. In Bangladesh, auto rickshaws/easy bikes commonly offer their taxi-services, as they are incredibly inexpensive to operate. Concurrently these three-wheelers running on fuel cause severe air-pollution and produce considerable amounts of greenhouse gasses (i.e. carbon dioxide). This paper presents a transportation system based upon auto rickshaws that operate in an eco-friendly way. Existing vehicles are to be substituted by a micro cross type system redesigned in a manner which boosts the efficiency of the vehicle. In addition, a recharging infrastructure is proposed that will allow for the power-packs to be charged using partially alternative energy such as solar power. Thus far, we have appeared at the existing vehicle and the environment, in which it operates and investigated re-charging infrastructure requirements and designs. The goal of the research presented in this paper is to develop a compact, robust and affordable hybrid system as a way to significantly reducing fuel consumption and exhausts of auto-rickshaws.*

Keywords: Solar power, Micro-Hybrid, Auto-Rickshaw, Environment friendly vehicle, Photovoltaic.

1. INTRODUCTION

With continued economic growth, all sectors of Bangladesh are developing day by day. With this development, megacities of the country are experiencing more traffic. Buses, Rickshaws and Auto-Rickshaws (Electric or ICE run) are the main public transports in it's megacities (i.e. Dhaka, Chittagong, Rajshahi). [1] The word rickshaw's is originated from Western language, and it converts to "a human derived vehicle". The word was first used in 1887[2] In Bangladesh the rickshaw commenced as a three-wheeled transport, known as pulled rickshaw, generally ripped by one man with one or two voyager. The rickshaw is a source of employment for male labors in Bangladesh from the 19th century being one of the oldest functions of transportation. The auto-rickshaw and the relatively modern iteration of the e-rickshaw (electronic rickshaw) because of their low cost is becoming more popular than taxis in 21st century. [3] In Asian megacities like Mumbai, Dhaka, Kolkata, Bengaluru, Chittagong this vehicle is mostly used for medium travelling distance (1 to 7 km's). Auto-rickshaws are a common means of public transportation in many developing countries in the world. [4, 1]

Auto-rickshaw is a three wheeler mostly running on fuel (CNG/LPG) or electrical energy.] Those running on batteries by means of electricity are often called "Easy Bikes", locally. This is a very cost effective vehicle. LPG

and CNG are nonrenewable energy sources. At present in Bangladesh the fuel price is increasing day by day. That's why the auto rickshaw drivers are claiming more money from the passengers. Burning of petrol, natural gas and oils produces carbon dioxide, which is responsible for global warming. Moreover exhaust gases release different types of deadly fluid aerosols and chemicals to the atmosphere which is very harmful for humans and animals. [5, 6] Presently there are many different auto-rickshaw types, designs, and variations. The most common type is characterized by a sheet-metal body or open frame resting on three wheels, a fabric roof with drop-down area curtains, a tiny cabin at the front for the driver (sometimes known as an auto-wallah) with handlebar controls, and a valuables, passenger, or sewing-embroidery space at the rear. [7]

The best way to redesign the rickshaw is to make the key power source replenishable. One way to do this is to use an energy system that can take advantage of several sources of renewable energy - namely, electricity. Auto-rickshaws are a great prospect for electrification because of relatively low velocity and a relatively small distance protected in a day. [1, 4, 8, 9] In this paper a mechanism using micro hybrid system to run a car rickshaw is shown and defined. Solar energy and thermal energy can be used to drive the auto-rickshaw jointly by means of hybridization. Solar energy is chosen here because Bangladesh gets huge amount of energy from

the sun. Here the best sunlight hours received is in Khulna ranging from 2.86 to 9.04 hours and in Barisal with readings varying from 2.65 to 8.75 hours. [10]

2. Theory:

In this proposed vehicle, electrical and thermal energy sources are combined via micro hybrid system. As energy sources ICE and Batteries are being used. These two power sources are hybridized. The battery is charged by means of national grid and solar energy. There are several hybridization methods available like Series, parallel, series-parallel and complex; parallel hybridization is implemented here. The basic difference between a hybrid and a conventional vehicle is the braking system. Hybrid vehicles use regenerative braking system; an energy recovery module which slows down the vehicle by transforming its kinetic energy into a form used immediately to other works or stored for further use. Thus hybrid vehicles are less fuel consuming [11]. Figure-1 shows the schematic diagram of the vehicle power train.

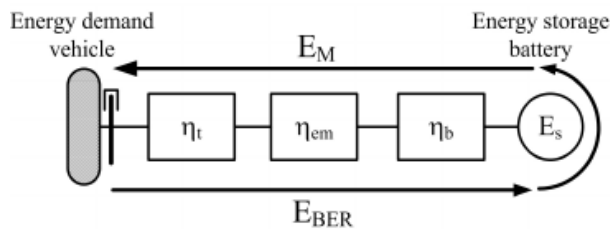


Fig.1: Schematic diagram of power train [9]

2.1. Topology Optimization:

In addition to the element sizing and control engine optimization, the topology selection also plays an important role in the general hybrid drive train optimization. In figure, an understanding is given of different locations of joining of the hybrid system to the drive coach. If more hybrid driving modes can be used, then fuel saving potential rises. Depending on the topology a number of the hybrid functions can be utilized very well and other functions increase difficulties. In Table-1 an overview is given of the pros and cons of the different topologies. Via this qualitative comparison it can be concluded that topology 1, 3, and 5 perform the same and are therefore favorable.

A Table showing the topological analysis is give below:

Topological Options for Proposed vehicle: ++ = very good, + = good, - = bad, \emptyset = not possible

Table 1: Topological Analysis

Topology	1	2	3	4	5
Regenerative Braking	++	-	+	+	+
Electric Driving	++	\emptyset	+	++	++
Charging (Driving)	-	++	++	+	+
Easy Mounting	++	-	-	-	+
Compacting	-	+	+	-	-
Start-Stop	\emptyset	++	+	\emptyset	\emptyset
Motor-Assistance	+	+	+	++	++

Possibility Score	43%	25%	40%	25%	50%
-------------------	-----	-----	-----	-----	-----

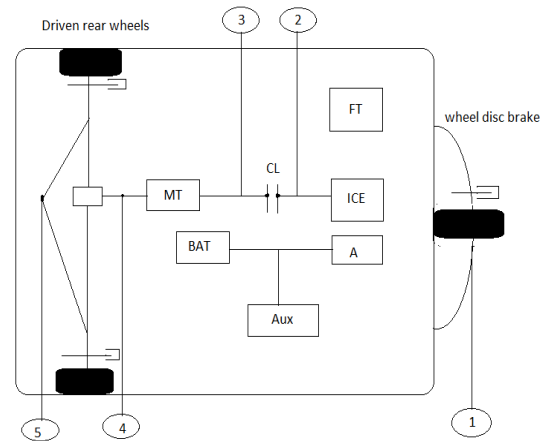


Fig.2: Topology designing of the proposed vehicle [9]

Figure-2 shows the topology designing of the proposed vehicle. The numbering indicates the possible locations of the components of the system. Here, ICE-Internal Combustion Engine, A-Alternator, FT-Fuel Tank of the vehicle, CL-Clutch (Wet-Plate type), BAT- Battery, Aux- Auxiliary Parts.

3. Power Analysis:

This paper focuses on micro hybridization of three-wheeler auto-rickshaw. Topology of the proposed system is shown in Table-I. This system has a conventional ICE and an electrical energy source namely, Li-ion battery used generally for medium load transfer. A micro hybrid vehicle uses a 'start-stop system', a regenerative braking technology is applied here for stopping an ICE when the system pulls to a stop and to restart it by pushing the accelerator. A vehicle can be hybridized in many different mechanisms. Micro hybridization is the simplest type. Here the proposed vehicle is being designed and the power calculations along with fuel consumption economy has been done under typical conditions and the parameters (with dimensioning) of the machine elements are given as per local market specifications available in Bangladesh.

3.1. Engine Specifications and Testing:

The specifications of the experimental engine are given below in Table-2: [12, 13]

Table 2: Experimental Engine Specifications [14]

Parameters	Dimension (SI unit)
Piston Diameter	$.050228 \times 10^{-3}$ Meters
Bore Radius	0.025114×10^{-3} Meters
Length of the Bore	0.046 Meters
Length of Stroke	0.042 Meters
Cubic Capacity	69.9×10^{-6} Cubic Meters
Type of Engine	2 Strokes
Number of Cylinders	01 pcs

Torque	12.531 N-m
Engine Efficiency	25%
Fuel	Petrol/Octane
Volume of Engine Cylinder	19 Cubic Meters (Approximate)
Brake Power	2.61kW @ 5000 rpm speed

3.1.1. Power calculation for experimental ICE:

ICE power calculations are shown in Table-3.

Table 3: Power calculation for IC engine

Particulates	Equation	Value
Displacement of engine	$\pi \cdot S^2 \cdot B \cdot n$	69.79×10^{-6} Cubic Meters
Stroke	$\frac{4D}{\pi B^2 n}$	0.042 Meters
Bore	$\frac{4D}{\pi S n}$	0.046 Meters
BMEP	$\frac{2\pi \times \text{Torque}}{\text{Displacement of Engine}}$	1129773.75 Pa
Fuel Consumption		10 kg/hr (Assumed) = 0.014 m ³ /h (As 1kg/sec = 5 m ³ /hr)
Mass Flow Rate	$\frac{\text{Volume of Engine Cylinder} \times \text{Sp. Gravity of Fuel}}{\text{Time} \times 1000}$	0.014 m ³ /hr = .0028 kg/sec
Angular Velocity	$\frac{2\pi N}{60}$	521.5 rad/sec (N = Engine Speed in rpm)
S.P. Fuel Consumption	$\frac{\text{Wt. of Fuel}}{\text{Brake Power}}$	0.036 kg/kW (Approximate)

3.2. Solar PV Module specifications and Calculations:

The battery used as electrical energy source will be charged in two ways, from National Grid and Solar PV module respectively. A perfect designed PV module is needed to charge the batteries. The specifications of the PV module are given in the following Table-4 below.

Table 4: Experimental PV module Specifications [15]

Parameters	Dimension (SI units)
Solar Panels	2 pcs
Rated Output	12V-180 W (Total)
Dimensions	1.5 × 0.8 × 0.05 meters
No. of Cells per Panel	N/A (variable)
Efficiency	18% (Approximately)

Battery	24 Volts, 4 pcs
No. of Solar Cells	60 mono crystalline cells

3.2.1. Power Consumption for PV module:

Let, The total weight of the vehicle (with passengers) = 500 kg

Average velocity of vehicle = 35 kmph

Here, Eq. (1) shows the total power needed to run the vehicle w.r.t. it's mass.

$$\begin{aligned} \text{Total Power} &= \text{Total weight of vehicle} \times g \times \\ &\text{speed} \times \text{gradient of velocity} \quad (1) \\ &= 500 \times 9.8 \times 35 \text{ kmph} \times .03 \text{ Watts} \\ &= 500 \times 9.8 \times 9.7 \text{ mps} \times .03 \text{ Watts} \\ &= 1426 \text{ Watts} \end{aligned}$$

Here, the induction motor used is of 12V-1kW rated.

$$\text{Current Flow} = \frac{P}{V} = \frac{1500}{36} \approx 42 \text{ Amp.}$$

Load Current per Day =

$$\begin{aligned} &\text{Current Flow} \times \text{Running Time per Day} \times 1.2 \\ &= 42 \times 5 \text{ hrs} \times 1.2 \approx 250 \text{ Amp.hrs/Day} \end{aligned}$$

Capacity of the Battery = Load Current per Day × 1.2 = 300 amp.hrs/Day (overall 25% losses)

Power required to run the motor = Capacity of Battery × Voltage Difference

$$= 250 \times 36 = 9000 \text{ Whrs/Day}$$

$$\text{No. of Batteries to be used} = \frac{1430}{378} = 4 \text{ pcs}$$

Now, here The Capacity of Solar Panel is 12V-180W, Current Flow = (180/12)/4 = 3.75 Amp to each Battery Charging Time = 250/3.75 = 66.67 hrs

If one Solar Panel is used then in 8 hrs of daylight the system will be charged $\frac{100 \times 8}{73.8}$ or 12%. But if the numbers of solar panels are increased then this charging would be more efficient. This percentage of charging can be increased by increasing the number of solar panels. If two solar panels are used, then the system will be charged 24% using PV module.

4. Feasibility testing:

Feasibility of this proposed system is analyzed by means of system installation cost and it's impact on environment.

4.1. Cost Analysis:

Total power calculated to run the system = 1426 watts
Power required to run the motor 9 kwatts.hr/day=9 unit
In Bangladesh commercial electric line cost 25 bdt/unit
Requires =9000/ 5*36*4=12.5 hours to charge the full battery.

Cost to charge the battery= 12.5*25=312.5 bdt/day

Case-1: When 1 pcs of Solar Panel is used,

PV module will supply 12% of total power.

So PV module will supply=9000*.12=1080 watts/day

So, Cost reduction= (1.08kw.hr*25) =27 bdt/day

Typical 180 W PV module costs approximately 40-45k bdt.

For two 40k bdt; payback time=40000/27=1482 days=4.05 years (approx.)

For two 45k bdt; payback time = 45000/27=1667 days=4.57 years (approx.)

Case-2: When 2 pcs of Solar Panel is used, PV module will supply 24% of total power. So PV module will supply=9000*.24=2160 watts/day So, Cost reduction=(2.16kw.hr*25)=54 bdt/day Typical 180 W PV module costs approximately 40-45k bdt.

For two 40k bdt; payback time=80000/54=1482 days=4.05 years (approx.)

For two 45k bdt; payback time = 90000/54=1667 days=4.57 years (approx.)

Thus, Case-2 is more favorable.

Figure-3 shows a graphical representation of the cost analysis of the system installation.

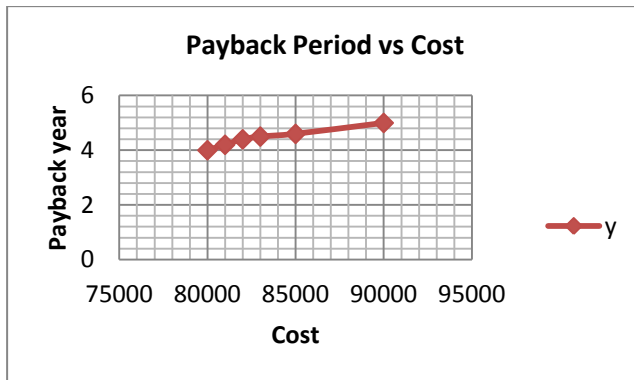


Fig.3: Graphical representing cost analysis of proposed system installation. (Period vs Cost Graph)

So, the payback time of this proposed system is between 4-4.5 years (approximately). A typical auto-rickshaw running age is between 18-20 years without much fluctuations in it's performance [16]. Fig.4 shows the relation between the running age and performance of a typical auto-rickshaw of Bangladesh.

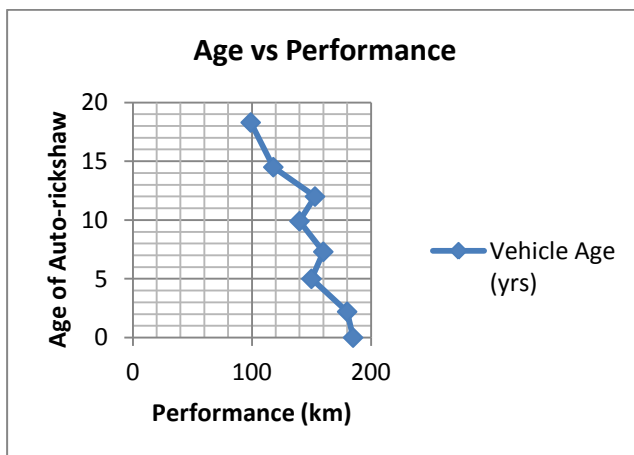


Fig.4: Age of Auto-rickshaw vs Performance (km)

This proposed system needs 4-4.5 years to gain the installation cost, this payback time is only about 22.5-25% or 1/4th of the total running lifetime of an auto-rickshaw.

4.2. Environmental Impact Analysis:

Environmental impact analysis of a system is a mathematical prediction of that shows how much environment friendly that system is or how much harm can it cause. It is a very important factor regarding feasibility measurement of a system. This research is mainly focused on lessen the conventional energy consumption via using renewable energy in Bangladesh. In Bangladesh, electricity is mainly produced by using thermal power plants. Those thermal power plants are a key source of CO₂ gas emission resulting in enhanced greenhouse effect. [5] A 500MW thermal power plant can produce upto 1 kg/kWhr production of electricity.[17]

Table-5 gives a complete knowledge about CO₂ emission from the power plants of Bangladesh.

All these properties are approximate and some are estimated.

Table 5: CO₂ emission rate (estimated) from some power plants of Bangladesh. [18, 19, 20, 21]

Installation Name	Capacity (KW)	CO ₂ emission (tons/day)	Nature of Combustion
Ghorashal	955	12.926	Oil Ignited
Barapukuria	250	5.685	Coal Fired
Ashuganj	660	4.1096	Oil Ignited
Khulna	225	2.5699	Dual Fuel
Haripur AES	360	1.789	Gas
Katakali	50	0.72399	Oil Ignited

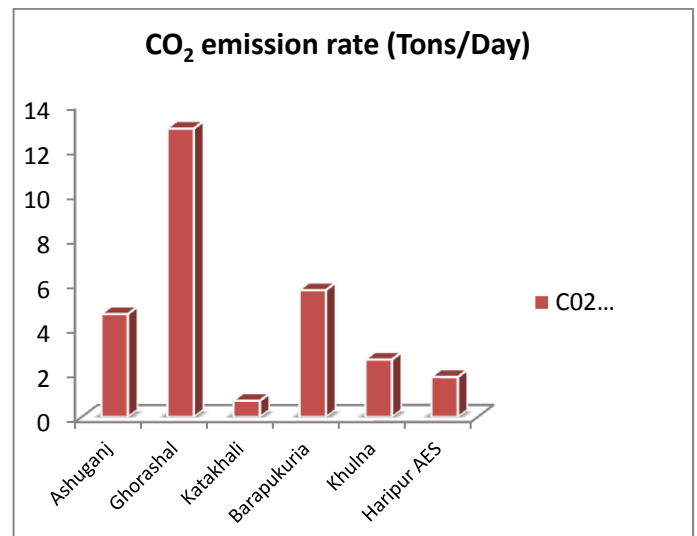


Fig.5: CO₂ emission rates of various power plants in Bangladesh.

Fig.5 shows CO₂ emissions of various power plant of Bangladesh. Our proposed vehicle system offers about 24% less power consumption from National Grid. So, a big number of these proposed vehicles will save more electrical energy resulting less emission of CO₂ from the fuel fired power plants.

Here, Katakhal Power Plant (Rajshahi) of 50MW capacity will be kept under consideration for calculation.

Assuming the plant as a 24 hrs/day working system, Maximum electricity supplied by the plant = 5000 kWhr

The daily CO₂ emission from Katakhal = 0.72399 tons

Daily emission of CO₂ per kWh energy =

$$\frac{\text{Daily CO}_2 \text{ emission}}{\text{Capacity of the Plant per Day in kWhr}} = 1.44798 \times 10^{-4} \text{ tons}$$

Now, if this proposed vehicle system is implemented on Rajshahi City then,

Let, The numbers of proposed auto-rickshaws = 2000 (estimated)

Energy savings per day per vehicle = 2.16 kWh (From previous feasibility calculation)

Total energy savings per day = (2000*2.16) kWh = 4320 kWh

CO₂ emission to produce 4320 kWh supply is = (4320 × 1.44798 × 10⁻⁴) tons = 0.62553 tons (w.r.t. Katakhal Plant)

Lessen of CO₂ emission from Katakhal via using this

$$\text{system} = \frac{0.62553}{0.72399} \times 100 = 86.4\%$$

From the above analysis it can be surely said that the proposed vehicle system if implemented in Rajshahi City, then per day CO₂ emission can be reduced upto 86.4% and power can be saved upto 4320 kWhr per day. This analysis was performed considering no system loss; there remains a 25% system loss in thermal power plants. If the system loss is considered then actual percentage of CO₂ emission lessens from Katakhal Plant will be about 76-82%.

This feasibility analysis shows this system not only a cost effective but also an environment friendly one. This analysis mathematically proves that vehicle system to be an effective one.

5. Properties of proposed mechanism and comparison with other systems:

1. Less noise production.
2. Less fuel consumption.
3. Environment friendly.
4. Less vibration.
5. Utilization of renewable energy.
6. Economical.
7. Finally, The system goes with the flow of modern technology.

Table-6, below clearly defines the basic differences among typical vehicles, electric vehicles and hybrid vehicles.

Table 6: Differences among typical (ICE), electrical and hybrid auto rickshaw:

<i>Typical</i>	<i>Electrical</i>	<i>Hybrid</i>
Huge amount of fuel consumption	Electrical power is used which is not always	Uses both electrical and Thermal energy.

	available in Bangladesh	So pressure on only one energy source reduces
It's pretty costly since fuel price is too high	Takes a lot of Electrical energy to charge the battery. so it can be considered costly too	Less costly because the battery can be charged by solar energy too.
Not environment friendly	Environment friendly	More environment friendly than typical rickshaw
Too much noise produces	Noise production less	Noise production less than typical one
Can carry more load than electrical Auto rickshaw	Carries less load than both of them	Can carry more load than electrical one
Vibration more	No vibration	Less vibration

6. Conclusion:

In the above described hybrid system A whole system combined with an ICE and electrical power source (rechargeable battery can be charged by solar power and national grid) was used which is not so familiar from the perspective of Bangladesh. Some of the data were collected from different auto rickshaw driver. Some data were neglected which were far away from the majority. Quite similar techniques can be seen in different automobiles but here the system is applied to a three wheeler.

7. Future Recommendations:

1. The engine being used here is an old one. The efficiency of the system can be improved by using a modern or developed one.
2. Since a new generation and developed system is introduced here so the driver needs to be a skilled one.
3. Wind turbine can be used in front of auto rickshaw to take out more advantage of the system.

8. Acknowledgement:

We fell highly indebted and would like to acknowledge with due respect and gratitude the valuable and undeniable helps and guidelines received from Prof. Dr. M.U.H. Joardder, Department of Mechanical Engineering and other Teachers of Rajshahi University of Engineering & Technology.

9. References:

- [1] Basri, R., Khatun, T., Reza, M. S., & Khan, M. M. H. Changing Modes of Transportation: A Case Study of Rajshahi City Corporation.
- [2] She, Lao, and Jean M. James. "Rickshaw: The Novel Lo-t'ohsiangtzu." (2013).
- [3] Brouwer, Roy, et al. "Socioeconomic vulnerability and adaptation to environmental risk: a case study of climate change and flooding in Bangladesh." Risk analysis 27.2 (2007): 313-326.
- [4] Arefin, Md. Arman, Avijit Mallik, and Imran Rashid

Mujawar. "A CASE STUDY ON 'DUAL ENERGY SOURCE RUNNING VEHICLE', IT'S DESIGN AND IMPLEMENTATION IN BANGLADESH." *International Journal of Science, Environment and Technology* 6.4 (2017): 2369-2385.

[5]Mujawar, Imran Rashid, and AvijitMallik. "Case Study On Greenhouse Process, Gases, Effect And Control Management." *International Journal of Innovative Research and Advanced Studies* 4.5 (2017): 430-440.

[6]Rajkumar, P. "Effect of air pollution on respiratory system of auto rickshaw drivers in Delhi." *Indian Journal of Occupational and Environmental Medicine* 3.4 (1999): 171-3.

[7]https://en.wikipedia.org/wiki/Auto_rickshaw (last accessed- 13/08/17)

[8]Lukic, Srdjan, Priscilla Mulhall, and Ali Emadi. "Energy Autonomous Solar/ battery Auto Rickshaw." *Journal of Asian Electric Vehicles* 6.2 (2008): 1135-1143.

[9]Hofman, T., Van Der Tas, S. G., Ooms, W., Van Meijl, E. W. P., &Laugeman, B. M. (2009). Development of a micro-hybrid system for a three-wheeled motor taxi. *World Electric Vehicle Journal*, 3(3), 1.

[10]SHAKIR-ulhaque Khan, TOWFIQ-ur, and SHAHADAT HossainRahman. "A brief study of the prospect of solar energy in generation of electricity in Bangladesh." *Cyber Journals: Multidisciplinary Journals in Science and Technology, Journal of Selected Areas in Renewable and Sustainable Energy (JRSE)*, June Edition (2012).

[11]Brandenburg, Larry R., and Edward T. King. "Hybrid electric vehicle regenerative braking energy recovery system." U.S. Patent No. 5,291,960. 8 Mar. 1994.

[12]Baglione, Melody L. "Development of System Analysis Methodologies and Tools for Modeling and Optimizing Vehicle System Efficiency." (2007).

[13]<http://www.bajajauto.com/bajajre/index.aspx> (last accessed- 13/08/17)

[14]Ferguson, Colin R., and Allan T. Kirkpatrick. *Internal combustion engines: applied thermosciences*. John Wiley & Sons, 2015.

[15]Green, Martin A. "Solar cells: operating principles, technology, and system applications." (1982).

[16]Rahim, M. A., Joardder, M. U. H., Houque, S. M., Rahman, M. M., &Sumon, N. A. (2013, February). Socio-economic & environmental impacts of battery driven auto rickshaw at Rajshahi city in Bangladesh. In *International Conference on Mechanical, Industrial and Energy Engineering* 2012.

[17]Rao, Anand B., and Edward S. Rubin. "A technical, economic, and environmental assessment of amine-based CO2 capture technology for power plant greenhouse gascontrol." *Environmental science & technology* 36.20 (2002): 4467-4475.

[18]Holloway, S. & Baily, H E. 1995. Coalbed methane pre-feasibility study - northwest Bangladesh. BGS Technical Report WC/95/59R. Overseas Geology Series, 52pp.

[19]Rahman, R.R. &Zaher, M.A. 1980. Jamalganj Coal – its quantity, quality and minability. *Petroleum and Mineral Resources of Bangladesh, Proceedings of the Seminar and Exhibition, 8-12 October 1980*. Peoples Republic of Bangladesh, 41-53.

[20]Nazrul Islam, M., NehalUddin, M., Resan, S.A., Sultan-Ul-Islam, M. &Wazed Ali, M. 1991. *Geology of the Khalspir Coal Basin, Pirganj, Rangpur, Bangladesh*. Records of

the Geological Survey of Bangladesh, Volume 6, Part 5.

[21] Norman, P.S. 1992. Evaluation of the Barapukuria coal deposit NW Bangladesh. In: Annels, A.E. (ed.) *Case Histories and Methods in Mineral Resource evaluation*. Geological Society Special Publication 63, 107-12.